



# FREIOTHERM-ATL-CorrosionResist

## WA4907HRU905

<b>Characteristics</b>	<ul style="list-style-type: none"> <li>■ Anodic electrocoat paint depositable 1K</li> <li>■ Application, e.g. in the job coater sector</li> <li>■ Subsequent paste filling, fully neutralised</li> <li>■ Single coat system</li> <li>■ Release Properties</li> </ul>																						
<b>Technical / Physical Data</b>	<table border="1"> <tr> <td>■ Binder-Base</td> <td>Acrylic-Epoxy Resin</td> </tr> <tr> <td>■ Colour</td> <td>black Based on the specified colour template (i.e. RAL)</td> </tr> <tr> <td>■ Solid Mass <small>DIN EN ISO 3251</small></td> <td>58-62 %</td> </tr> <tr> <td>■ Density <small>calculated</small></td> <td>1,08 g/cm<sup>3</sup></td> </tr> <tr> <td>■ MEQ-Base-Value <small>DIN EN ISO 15880</small></td> <td>36-43</td> </tr> <tr> <td>■ Viscosity</td> <td>2000-6000 mPa.s</td> </tr> <tr> <td>■ Test layer thickness</td> <td>15-25 µm</td> </tr> </table>	■ Binder-Base	Acrylic-Epoxy Resin	■ Colour	black Based on the specified colour template (i.e. RAL)	■ Solid Mass <small>DIN EN ISO 3251</small>	58-62 %	■ Density <small>calculated</small>	1,08 g/cm <sup>3</sup>	■ MEQ-Base-Value <small>DIN EN ISO 15880</small>	36-43	■ Viscosity	2000-6000 mPa.s	■ Test layer thickness	15-25 µm								
■ Binder-Base	Acrylic-Epoxy Resin																						
■ Colour	black Based on the specified colour template (i.e. RAL)																						
■ Solid Mass <small>DIN EN ISO 3251</small>	58-62 %																						
■ Density <small>calculated</small>	1,08 g/cm <sup>3</sup>																						
■ MEQ-Base-Value <small>DIN EN ISO 15880</small>	36-43																						
■ Viscosity	2000-6000 mPa.s																						
■ Test layer thickness	15-25 µm																						
<b>Mechanical Test</b>	<table border="1"> <tr> <td>■ on aluminium / aluminium pressure casting</td> <td></td> </tr> <tr> <td>■ Cross-cut-test <small>DIN EN ISO 2409</small></td> <td>Gt 0</td> </tr> <tr> <td>■ Buchholz penetration test <small>DIN EN ISO 2815</small></td> <td>0,8 mm</td> </tr> </table>	■ on aluminium / aluminium pressure casting		■ Cross-cut-test <small>DIN EN ISO 2409</small>	Gt 0	■ Buchholz penetration test <small>DIN EN ISO 2815</small>	0,8 mm																
■ on aluminium / aluminium pressure casting																							
■ Cross-cut-test <small>DIN EN ISO 2409</small>	Gt 0																						
■ Buchholz penetration test <small>DIN EN ISO 2815</small>	0,8 mm																						
<b>Resistance Test</b>	<table border="1"> <tr> <td>■ on aluminium / aluminium pressure casting</td> <td></td> </tr> <tr> <td>■ Salt spray test (NSS) <small>DIN EN ISO 9227</small></td> <td>120 hours water ingress Wb &lt;1 mm <small>DIN EN ISO 4628-8</small></td> </tr> </table>	■ on aluminium / aluminium pressure casting		■ Salt spray test (NSS) <small>DIN EN ISO 9227</small>	120 hours water ingress Wb <1 mm <small>DIN EN ISO 4628-8</small>																		
■ on aluminium / aluminium pressure casting																							
■ Salt spray test (NSS) <small>DIN EN ISO 9227</small>	120 hours water ingress Wb <1 mm <small>DIN EN ISO 4628-8</small>																						
<b>Processing and application</b> Dependent on plant and buildings	<table border="1"> <tr> <td>■ <b>Pretreatment</b> The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue.</td> <td></td> </tr> <tr> <td>■ Gloss value <small>DIN EN ISO 2813</small></td> <td>65-75 geometry 60°</td> </tr> <tr> <td>■ pH-Value</td> <td>8,2-9,0</td> </tr> <tr> <td>■ Cundctance</td> <td>1000-1400 µS/cm</td> </tr> <tr> <td>■ Solid Mass <small>DIN EN ISO 3251</small></td> <td>13-15 %</td> </tr> <tr> <td>■ MEQ-Base-Value <small>DIN EN ISO 15880</small></td> <td>40-50 mg/g</td> </tr> <tr> <td>■ Organic Solvent Content</td> <td>0,8-1,5 %</td> </tr> <tr> <td>■ Bath Temperature</td> <td>24-27 °C</td> </tr> <tr> <td>■ Coating Time</td> <td>60-180 seconds</td> </tr> <tr> <td>■ Deposition Voltage</td> <td>160-300 voltage</td> </tr> <tr> <td>■ <b>Health &amp; Safety at Work guidelines</b></td> <td></td> </tr> </table>	■ <b>Pretreatment</b> The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue.		■ Gloss value <small>DIN EN ISO 2813</small>	65-75 geometry 60°	■ pH-Value	8,2-9,0	■ Cundctance	1000-1400 µS/cm	■ Solid Mass <small>DIN EN ISO 3251</small>	13-15 %	■ MEQ-Base-Value <small>DIN EN ISO 15880</small>	40-50 mg/g	■ Organic Solvent Content	0,8-1,5 %	■ Bath Temperature	24-27 °C	■ Coating Time	60-180 seconds	■ Deposition Voltage	160-300 voltage	■ <b>Health &amp; Safety at Work guidelines</b>	
■ <b>Pretreatment</b> The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue.																							
■ Gloss value <small>DIN EN ISO 2813</small>	65-75 geometry 60°																						
■ pH-Value	8,2-9,0																						
■ Cundctance	1000-1400 µS/cm																						
■ Solid Mass <small>DIN EN ISO 3251</small>	13-15 %																						
■ MEQ-Base-Value <small>DIN EN ISO 15880</small>	40-50 mg/g																						
■ Organic Solvent Content	0,8-1,5 %																						
■ Bath Temperature	24-27 °C																						
■ Coating Time	60-180 seconds																						
■ Deposition Voltage	160-300 voltage																						
■ <b>Health &amp; Safety at Work guidelines</b>																							

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business and delivery.



**FREIOTHERM-ATL-CorrosionResist  
WA4907HRU905**


The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet.

**Curing**

■ **Object temperature**

Recommended baking temperature 20 Min./170 °C

green cross-hatching = baking conditions with good final properties

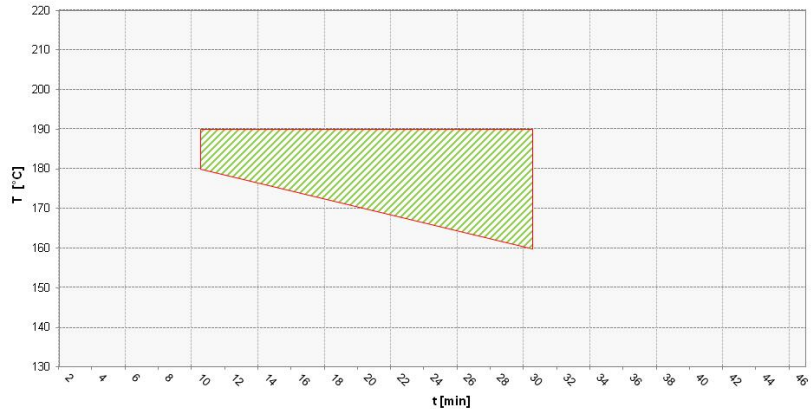

**Resistance to storage**

■ One Turn-Over per year

Approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.

The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.

**Specific comments**

■ **Test conditions**

All information is based on a standard climate 23/50 DIN EN 23270.

All information is based on our product knowledge an experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.