



## WA4775HRU735 FREIOTHERM-ATL-Special

### Product description

<b>Product technology</b>	anodic electrocoat paint depositable 1K
<b>Application area</b>	Application, e.g. in the functional furniture and storage technology sector
<b>Application</b>	Primer and single coat system
<b>Type of paste</b>	Subsequent paste filling, partly neutralised
<b>Scratch resistance</b>	high scratch resistance

### General product properties

<b>Binder-Base</b>	Acrylic Resin	
<b>Colour</b>	Light grey	
<b>Viscosity</b>	5000-10000 mPa*s	
<b>MEQ-Base-Value</b>	21-28 mg/g	DIN EN ISO 15880
<b>Density</b>	1,2-1,3 g/cm <sup>3</sup>	theoretical
<b>Solid mass</b>	63-67 %	theoretical
<b>Resistance to storage</b>	<p>approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.</p> <p>The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.</p>	

### Application and processing

<b>Pretreatment</b>	The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, mill scale, wax and release agent residues. We recommend the use of suitable mechanical pre-treatment processes (e.g. blasting, grinding) or chemical pre-treatment processes (e.g. phosphating) according to the requirements.	
<b>Gloss value</b>	40-60 GU, Angle 60°	DIN EN ISO 2813
<b>Recommended coating thickness</b>	18-22 µm	
<b>pH-Value</b>	8,1-8,5	DIN 19260
<b>Cunductance</b>	1200-1500 µS/cm	
<b>Solid mass</b>	14-16 %	DIN EN ISO 3251
<b>MEQ-Base-Value</b>	40-50 mg/g	DIN EN ISO 15880
<b>Organic Solvent Content</b>	1,0-1,6 %	
<b>Bath Temperature</b>	24-27 °C	
<b>Coating Time</b>	60-180 sec.	

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business, delivery and payment.

DIN EN ISO 9001 | IATF 16949 | EMAS | DIN ISO 45001

Page 1/3 | Version 0

Revision date: Feb 7, 2023

Print date: Mar 8, 2023

FreiLacke | Emil Frei GmbH & Co. KG

Am Bahnhof 6  
78199 Bräunlingen-Döggingen | Deutschland  
+49 77071510

[www.freilacke.de](http://www.freilacke.de) | [info@freilacke.de](mailto:info@freilacke.de)



## WA4775HRU735 FREIOTHERM-ATL-Special

### Deposition Voltage

100-230 Volts


### Turn-over

1 Turnover per year

To ensure bath stability and thus the coating quality, the specified turnover (solids exchange of the ETL tank) must be observed.

### Curing

Recommended baking temperature 20 min / 170 °C

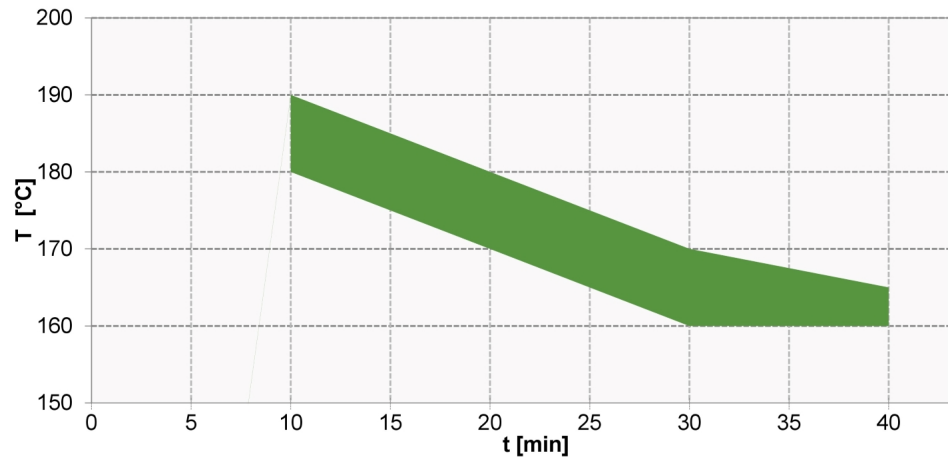

Objekt Temperatur in °C Object Temperature in °C	160	170	180
Haltezeit Minimum in Minuten Holding time minimum in minutes	30	20	10
Haltezeit Maximum in Minuten Holding time maximum in minutes	40	30	20

### Note on curing

Coloured area = stoving conditions with good end properties

The displayed baking conditions are based on results from laboratory tests and therefore merely serve as a guideline when configuring the processing company's coating systems. The processing company is responsible for ensuring that the coating is fully cured. The complete curing of the coating must be checked by means of additional analytical and resistance tests using representative original parts under production conditions. Please do not hesitate to contact us if you require consultation.

### Mechanical tests

Test substrate	on phosphate free conversion	
Cross-cut-test	Gt 0	DIN EN ISO 2409
Erichsen index	4 mm	DIN EN ISO 1520
Mandrel bending test cylindrical	8 mm	DIN EN ISO 1519
Pencil Hardness	3 H	DIN EN ISO 15184
Buchholz penetration test	1,0 mm	DIN EN ISO 2815

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business, delivery and payment.

DIN EN ISO 9001 | IATF 16949 | EMAS | DIN ISO 45001

Page 2/3 | Version 0

Revision date: Feb 7, 2023

Print date: Mar 8, 2023

FreiLacke | Emil Frei GmbH & Co. KG

Am Bahnhof 6  
78199 Bräunlingen-Döggingen | Deutschland  
+49 77071510

[www.freilacke.de](http://www.freilacke.de) | [info@freilacke.de](mailto:info@freilacke.de)



## WA4775HRU735

## FREIOTHERM-ATL-Special

### Comments

#### Work-and Healthprotection

The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health and Safety at Work and environmental protection can be found in the corresponding safety data sheet.

#### Test conditions

All information is based on a standard climate 23/50 DIN EN 23270. All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.