


### Pulverlacksförbrukning

Enligt förenklad beräkningsformel: Förbrukning i g/m<sup>2</sup> = densitet x skiktjocklek

Diagram

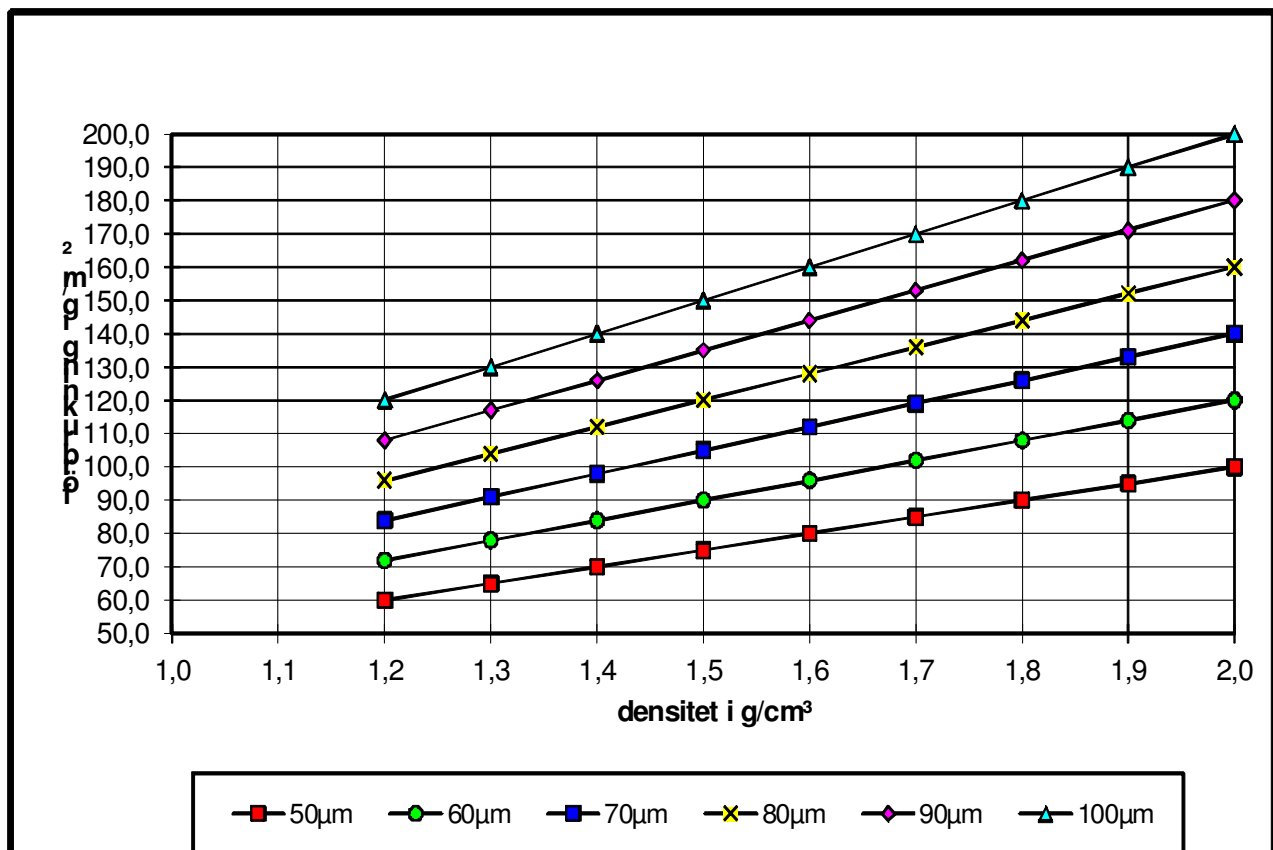

Tabell

Densitet g/cm <sup>3</sup>	Pulverförbrukning i g/m <sup>2</sup> vid en skiktjocklek på					
	50µm	60µm	70µm	80µm	90µm	100µm
1,2	60,0	72,0	84,0	96,0	108,0	120,0
1,3	65,0	78,0	91,0	104,0	117,0	130,0
1,4	70,0	84,0	98,0	112,0	126,0	140,0
1,5	75,0	90,0	105,0	120,0	135,0	150,0
1,6	80,0	96,0	112,0	128,0	144,0	160,0
1,7	85,0	102,0	119,0	136,0	153,0	170,0
1,8	90,0	108,0	126,0	144,0	162,0	180,0
1,9	95,0	114,0	133,0	152,0	171,0	190,0
2,0	100,0	120,0	140,0	160,0	180,0	200,0