



WA4902HRU905

FREIOTHERM-ATL-Fast Reactive

Product description

Product technology	anodic electrocoat paint depositable 2K	
Application area	e.g. in the mechanical engineering and plant construction sector	
Type of paste	Pigment paste, fully neutralised	

General product properties

Binder-Base	Acrylic Resin	
Colour	Jet black	
Viscosity	3000-9000 mPa*s	
MEQ-Base-Value	46-53 mg/g	DIN EN ISO 15880
Density	1,0-1,2 g/cm ³	theoretical
Solid mass	46-50 %	theoretical
Resistance to storage	<p>approx. 6 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.</p> <p>The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.</p>	

Application and processing

Pretreatment	The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, mill scale, wax and release agent residues. We recommend the use of suitable mechanical pre-treatment processes (e.g. blasting, grinding) or chemical pre-treatment processes (e.g. phosphating) according to the requirements.	
Gloss value	20-40 GU, Angle 60°	DIN EN ISO 2813
Mixin ratio	Products WA4006:WA4902 Parts by weight 1 : 1	
Recommended coating thickness	12-25 µm	
pH-Value	8,0-8,7	DIN 19260
Cunductance	1500-3000 µS/cm	
Solid mass	12-19 %	DIN EN ISO 3251
Bath Temperature	24-27 °C	
Coating Time	60-180 sec.	
Deposition Voltage	50-250 Volts	



WA4902HRU905 FREIOTHERM-ATL-Fast Reactive


Turn-over

1 Turnover per year

To ensure bath stability and thus the coating quality, the specified turnover (solids exchange of the tank) must be observed.

Curing

Recommended object temperature 30 min/120 °C

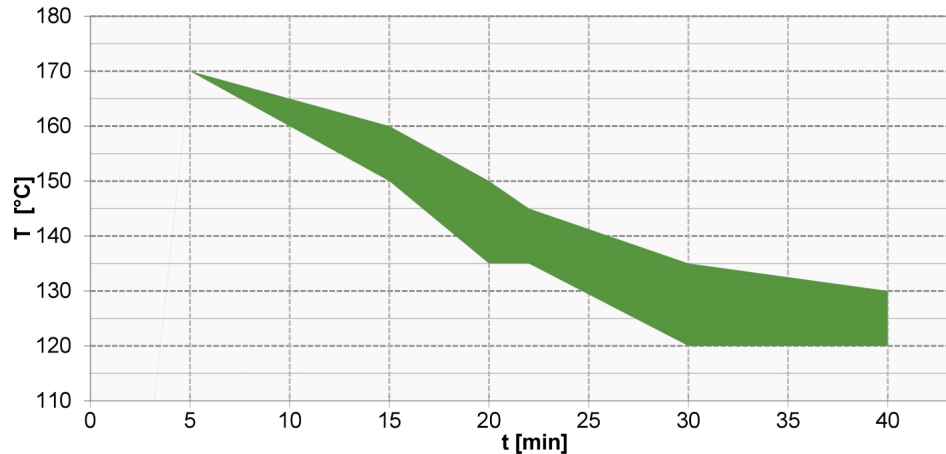

Objekt Temperatur in °C Object Temperature in °C	120	135	150
Haltezeit Minimum in Minuten Holding time minimum in minutes	30	22,5	15
Haltezeit Maximum in Minuten Holding time maximum in minutes	40	30	20

Note on curing

Coloured area = stoving conditions with good end properties

The displayed baking conditions are based on results from laboratory tests and therefore merely serve as a guideline when configuring the processing company's coating systems. The processing company is responsible for ensuring that the coating is fully cured. The complete curing of the coating must be checked by means of additional analytical and resistance tests using representative original parts under production conditions. Please do not hesitate to contact us if you require consultation.

Mechanical tests

Test substrate

on steel, purified alkaline

Cross-cut-test

Gt 0

DIN EN ISO 2409



WA4902HRU905

FREIOTHERM-ATL-Fast Reactive

Comments

Work-and Healthprotection

The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health and Safety at Work and environmental protection can be found in the corresponding safety data sheet.

Test conditions

All information is based on a standard climate 23/50 DIN EN 23270. All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.