


## Pulverlacksförbrukning

Enligt förenklad beräkningsformel: Förbrukning i g/m<sup>2</sup> = densitet x skiktjocklek

Diagram

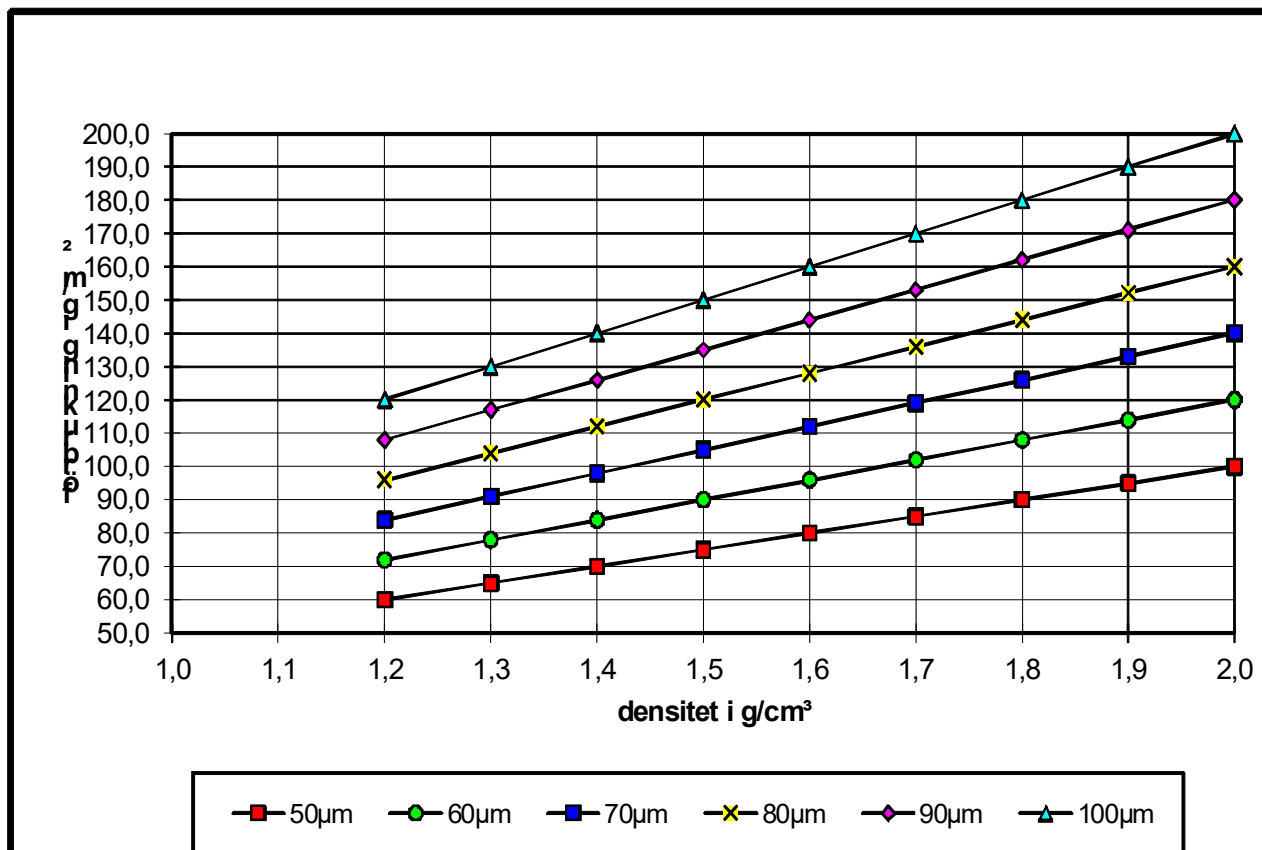

Tabell

| Densitet g/cm <sup>3</sup> | Pulverförbrukning i g/m <sup>2</sup> vid en skiktjocklek på |       |       |       |       |       |
|----------------------------|---|-------|-------|-------|-------|-------|
|                            | 50µm  | 60µm  | 70µm  | 80µm  | 90µm  | 100µm |
| 1,2                        | 60,0  | 72,0  | 84,0  | 96,0  | 108,0 | 120,0 |
| 1,3                        | 65,0  | 78,0  | 91,0  | 104,0 | 117,0 | 130,0 |
| 1,4                        | 70,0  | 84,0  | 98,0  | 112,0 | 126,0 | 140,0 |
| 1,5                        | 75,0  | 90,0  | 105,0 | 120,0 | 135,0 | 150,0 |
| 1,6                        | 80,0  | 96,0  | 112,0 | 128,0 | 144,0 | 160,0 |
| 1,7                        | 85,0  | 102,0 | 119,0 | 136,0 | 153,0 | 170,0 |
| 1,8                        | 90,0  | 108,0 | 126,0 | 144,0 | 162,0 | 180,0 |
| 1,9                        | 95,0  | 114,0 | 133,0 | 152,0 | 171,0 | 190,0 |
| 2,0                        | 100,0   | 120,0 | 140,0 | 160,0 | 180,0 | 200,0 |