

....

System coating solutions for rail vehicles

Certified solutions of the highest quality.



Applied solutions.

System coatings for optimum results.

System solutions in accordance with SNCF norms and DB standard:

- Product qualification according to NF F 19-477 and DBS 918300 and DBS 918340
- Fire protection in accordance with EN 45545-2
- For technical components
- For decorative exterior coatings with graffiti protection and excellent repair capability •
- Consulting and training of system coating users in planning and processing

...from one source



System coating for best results - and that includes the product mix. FreiLacke is the specialist when it comes to system coatings and system coating expertise. Both terms have been heavily influenced by the work of the long-established company from Black Forest in Germany.

We develop and produce all conventional coating systems under one roof. This means we can offer our customers not only all the important coating technologies but can also match them regarding coating structure and finish - to optimum effect.

The advantages: Best material properties, consistent colour results (even with varying products and coating types) and the needs-based configuration of individual coatings - and all from a single source.



in antyste 2 2200000 Market Management Management



KANPORT NEC at semantic series sizes size ST 16-47 DECEMENT - MERCENT	DB	(0) Deterministical Cost Winkmall: and Eligencoviria 17 (2005) Elizability (Control on 142194 Bianderbilog Kolondon www.Brannistical Kolondon www.Brannistical Kolondon
er et australe anstale under kommen fanze australe anstalen indere indere Australe anstalen. Beself beselfen anstalle australe anstalen	für Pulverlacke er	Produktessäffikation rispenchend DIS 501 Jaü Dekorativer inverdereich Alaminian Nr. 3
52 2606 au 1811 2018 saon barl 4 19 417 (2022 M) 31 13 (2 patient encies, angefilten US226.	Finatproducent: E-ml Fin Diliggin Avi: 54 782391 Deutsut	gen Indual E Debardingen
	 findate.	FREOPOX Pulvelack PB
perme avec des portures poultre gamma l'imperierte de la tecume	Setural televity	Dekeativer Investment's wer Schierundahrzeugen der DB AG.
(nem / sustauth 10/200°C,	Geburgsdaver:	Die Geffungsdauer der Prickleispaßkation benägt 3. Jahre, von April 2007 bis Marz 2022.
View Internet (0100/0)	Anerrshegaberech:	Beschichtung win Schleverfahrsnigkomponenten aus Auronium tür den dekorativen Innerbereich von Schleverfahrzeugen der DB AG.
anaan 10 000 C	Quilikatorigunitaan	Geputte Vudetandlang: - Passivernite Vudetandlang mit Konversionsschafte Vitanziten - 16012 junterwart, Möstpassider Sastern 3 und 21.02.2017, WO brand tie Oberfahrenentink Geneti
et pourtes al anexes 1,2 et 3.	Banbubeta	910 Institut für Oberflächentechnik Grider Prüfberüber 290-18-0155, PBI 34-3393, PKD 18-4377, PSD 36-5267, PKD 35-8089 Haland Level H.3.56 Antiedenselatur 81 erfdit
66/04/14/01 0000 A 750 A 1300 A 1300 A	Schuhokker	Meimun (Kanoslonoschutz): 60 an Masimun (Blandschutz): 230 an
HA 668 U.A 60.0 0.20 0.21 0.00 HA 01.0 40.2 10.3 0.27 0.27 1.36 HA 01.2 10.3 0.27 4.27 4.01	Qualitation	Der Finstprodurent gewährleistet für jede Liebenang die der Produktipusl- Bastist zu Disielle gelegtet Konsiserte nach DIS 518 343.
860 468 222 283 132 133 148	Kirilminer, den 10.08,20 Bratheiter (h. A. Recke	917
les natificates de la 16 V 7 21 112 permar de classer les produits sont les matericals (yeu Grey 10	U. J. S.J. Dichog. C. Bohr 13 (91) 3 (2)	
Approbation du report : Non- American Triangladi? None- Report du Triangladi?		amada ka Saudila Sana Antonia Managa Antonia Antonia Saudi Kara Lang Antonia Sala Sana Sana Sana Sana Sana Mana Tang Mana Tang Mana Sana Sana Sana Sana Sana Sana Sana
Autoral Protocol Testinghouse States and an arrival and an arrival and an arrival and arri		

Applied solutions.

Application solutions from one source.

High performance coating systems

The strict quality requirements of the national railways and the train manufacturers require certified coating systems of the highest quality.

FreiLacke offers diverse and certified system coating solutions in the areas of powder coatings, liquid coatings and composites for exterior and interior. All solutions are produced from one source, perfectly matched to each other and ensure ideal processing and the highest quality.

Our powder coatings fulfil the SNCF requirements according to NF F 19-477 and the German Railway Standard (DBS) 918 340 and our liquid coatings fulfil the DBS 918 300 quality standard. We also have fire test certificates available in accordance with the European standard EN 45545-2.



Exterior coatings Anti-graffiti

Special solutions/Special coatings








Interior coatings Anti-graffiti

Technical coatings

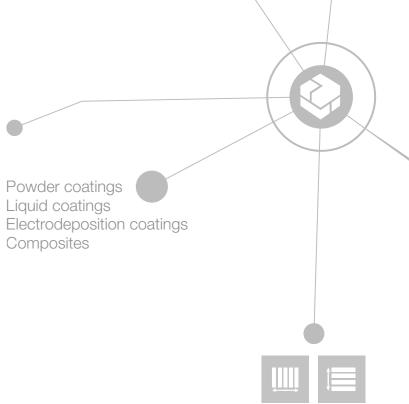






Exterior coatings Anti-graffiti

- For the decorative exterior coating of vehicle bodies and components •
- Liquid and powder coatings matched as system coatings
- Optimum weather resistance and gloss retention in all climates •
- Excellent graffiti protection and ability to remove it •
- Excellent resistance against standard cleaning and graffiti-removing agents •
- Perfect pictogram and decorative film adhesion despite anti-graffiti properties of the coating film •
- Proven powder and liquid coating repair solution with qualified coating systems •
- Robust paint application process to insure constant quality •
- Consulting and training of system coating users in planning and processing as well as smart and spot • repair

•	For the	decorative	interior	coating	of vehicle	bodies	ar
---	---------	------------	----------	---------	------------	--------	----

- Excellent graffiti protection and ability to remove it •
- Excellent resistance against standard cleaning and graffiti-removing agents •
- Perfect pictogram and decorative film adhesion despite anti-graffiti properties of the coating film •
- Proven powder and liquid coating repair solution with qualified coating systems •
- Robust paint application process to insure constant quality •
- Consulting and training of system coating users in planning and processing as well as smart and spot repair

Coating Type	Substrate	Component	Article Code		
Powder	Aluminium/Steel	Components for outdoor use	PZ6 / PZ49 + PZ6		
Liquid	All Substrates	Components for indoor and outdoor use	ER1923 + DC1983 / ER1923 + DL1110 + DC1983		
Liquid hydro	All Substrates	Components for outdoor use	ER1923 + DW11 system		













Interior coatings Anti-graffiti

and components

• Liquid and powder coatings as system coatings matching colour tone, gloss level and surface structures





Technical coatings

Special solutions/Special coatings

- For the technical exterior coating of components for all climates
- Liquid and powder coatings matched as system coatings
- Outstanding corrosion protection and systems for special requirements relating to heavy-duty corrosion protection
- Resistant to standing water and prolonged effects of cleaning agents •
- Stone chip protection ٠
- Proven powder and liquid coating repair solution with qualified coating systems •
- Robust manufacture for results of optimum quality ٠
- Consulting and training of system coating users in planning and processing

Coating Type	Substrate	Component	Article Code		
Powder	Aluminium	Underfloor components, Roof Container	PZ1		
Powder	Steel/Stainless steel	Underfloor components, Roof Container	PZ71 + PZ1		
Liquid	All Substrates	Bogies/Underfloor components/Subfloors	ER1923 + ER1972		
Liquid	Steel	Bogies/Underfloor components/Subfloors (for heavy-duty corrosion protection C5M)	ER1943 + ER1972		
Liquid	All Substrates	Components for indoors and outdoors	ER1923 + DC1983 / ER1923 + DL1110 + DC1983		
Liquid	All Substrates	Bogies/Underfloor components/Subfloors	DL1201		
Liquid hydro	All Substrates	Exterior components	ER1923 + DW1593		
Liquid hydro	Steel	Wheel sets	KP1631L + DW1593		

Scratch-resistant surfaces for interior coatings for high wear resistance. •

- NFF 19-223
- Gel coats and resins for fibre composite materials with fire protection in accordance with EN 45545-2
- Styrene-free and solvent-free fibre composite material systems in accordance with EN 45545-2 •
- Consulting and training of system coating users in planning and processing

Coating Type	Substrate	Component	Article Code		
Powder + liquid	Steel	Handrails (high scratch resistance)	PZ71 + PZ1 + KO1853		
Powder + Liquid	Aluminium/Stainless steel	Handrails (high scratch resistance)	PZ1 + KO1853		
Liquid hydro	Aluminium/Steel	Impact resistance for axles and underbody	KP1631L DW1594URU712		
Fibre composite	-	Interior and exterior components	BD7764X + BD7240X		
Fibre composite	-	Interior and exterior components (styrene-free and solvent-free)	PM1005A		


PIMC - Powder InMould Coating SMC/BMC powder coating in the pressing tool

The powder coating of SMC/BMC can be easily integrated in the pressing process. The powder coating is sprayed into the pressing mould manually or automatically. The highly reactive coating hardens in a few seconds so the SMC/BMC can be laid in immediately and pressed. The cycle time is only depending on the powder coating application time (depending on the component, approx. 30 sec.).

After pressing, the finished, coated component can be demoulded as usual. The typical fibre marking is completely levelled out by the PIMC process, the parts are given a highly resistant and very homogeneous surface.





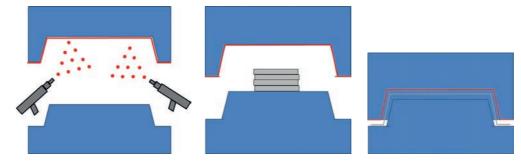

Powder coating application

Lay SMC into the press

Impact resistance for sensitive underbody areas and train axles in accordance with EN 13261, class 1 and








Our solutions at a glance.

solution	s at a gla	nce.									
Coating Type	Installation Location	Function	Substrate	Component	Surface	Gloss	Number of Layers	Article Code	Railway certifica- tion DBS / SNCF	Fire protec- tion EN 45545-2	Repair Solution
Powder + liquid	Interior/Exterior	Decorative	Steel	Handrails (high scratch resistance)	Smooth	All gloss levels	3	PZ71 + PZ1 + KO1853	+/-	Yes	DC1983
Powder + Liquid	Interior/Exterior	Decorative	Aluminium/Stainless steel	Handrails (high scratch resistance)	Smooth	All gloss levels	2	PZ1 + KO1853	+/-	Yes	DC1983
Powder	Exterior	Technical	Aluminium	Underfloor components, Roof Container	Smooth	Matt, silky gloss or special setting	1	PZ1	+/+	Yes	DC1983
Powder	Exterior	Technical	Steel/Stainless steel	Underfloor components, Roof Container	Smooth	Matt, silky gloss or special setting	2	PZ71 + PZ1	+/+	Yes	DC1983
Powder	Interior	Decorative	Aluminium	Interior Ceiling/Interior Panelling/Handrails	Smooth	Matt, silky gloss or special setting	1	PZ5 / PZ1	+/+	Yes	DC1983
Powder	Interior	Decorative	Steel	Interior Ceiling/Interior Panelling/Handrails	Smooth	Matt, silky gloss or special setting	1	PZ1	+/+	Yes	DC1983
Powder	Interior	Decorative	Aluminium	Interior Panelling	Structured	Matt, satin matt Satin gloss	1	PZ1	+/+	Yes	DC1979 or DC1983
Powder	Interior	Decorative	Aluminium	Desk Panels	Smooth	Matt or dull matt	12	PZ1 + KO1853	+/+	Yes	DC1983 or UR1929
Powder	Interior	Decorative	Aluminium/Stainless steel	Foot Pedestal	Smooth	Matt, silky gloss or special setting	1	PZ5 / PZ1	+/+	Yes	DC1983
Powder	Interior	Decorative	Steel/Stainless steel	Foot Pedestal	Smooth	Matt, silky gloss or special setting	2	PZ71 + PZ1	+/+	Yes	DC1983
Powder	Interior	Decorative	Aluminium	Seats	Smooth	Matt, silky gloss or special setting	1	PZ5 / PZ1	+/+	Yes	DC1983
Powder	Exterior	Decorative	Aluminium/Steel	Components for outdoor use	Smooth	Satin gloss up to high gloss	12	PZ6 or PZ49 + PZ6	+/+	Yes	DC1983
Liquid	Exterior	Technical	All Substrates	Bogies/Underfloor components/Subfloors	Smooth	Matt, satin matt, satin gloss	2	ER1923 + ER1972	+ / - (Sheet 40)	Yes	By itself
Liquid	Exterior	Technical	Steel	Bogies/Underfloor components/Subfloors (for heavy-duty corrosion protection C5M)	Smooth	Matt, satin matt, satin gloss	2	ER1943 + ER1972	-	Yes	By itself
Liquid	Indoor	Decorative	All Substrates	Interior ceiling/Interior panelling/Interior compo- nents	Smooth/ Structured	Matt to glossy	2	ER1923 + DC1983	+ / - (Sheet 38)	Yes	By itself
Liquid	Interior/Exterior	Decorative/ Technical	All Substrates	Components for indoors and outdoors	Smooth	Matt to high gloss	2/3	ER1923 + DC1983 / ER1923 + DL1110 + DC1983	+ / - (Sheet 34)	Yes	By itself
Liquid	Exterior	Technical	All Substrates	Bogies/Underfloor components/Subfloors	Smooth	Satin gloss	1	DL1201	+ / - (Sheet 40)	Yes	By itself
Liquid hydro	Exterior	Decorative	All Substrates	Components for outdoors	Smooth	High gloss	3/4	ER1923 + DW11 system	+ / - (Sheet 39)	In progress	DC1983 + DW11 Clearcoat
Liquid hydro	Exterior	Technical	All Substrates	Exterior components	Smooth	Satin matt	2	ER1923 + DW1593	+ / - (Sheet 9)	Yes	By itself
Liquid hydro	Exterior	Technical	Aluminium/Steel	Impact resistance for axes and underbodies	Smooth	matt	2	KP1631L DW1594URU712	in progress	in progress	By itself
Liquid hydro	Exterior	Technical	Steel	Wheel sets	Smooth	Satin matt	2	KP1631L + DW1593	+/-	Yes	By itself
Fibre composite	Interior/Exterior	Technical	-	Interior and exterior components	Smooth	-	2	BD7764X + BD7240X	-	in progress	By itself
Fibre composite	Interior/Exterior	Decorative/ Technical	-	Interior and exterior components (styrene-free and solvent-free)	Smooth/ Structured	All gloss levels	1	PM1005A	-	Yes	DC1983
1 195510		and the second				and the second sec					

As at: 07/20



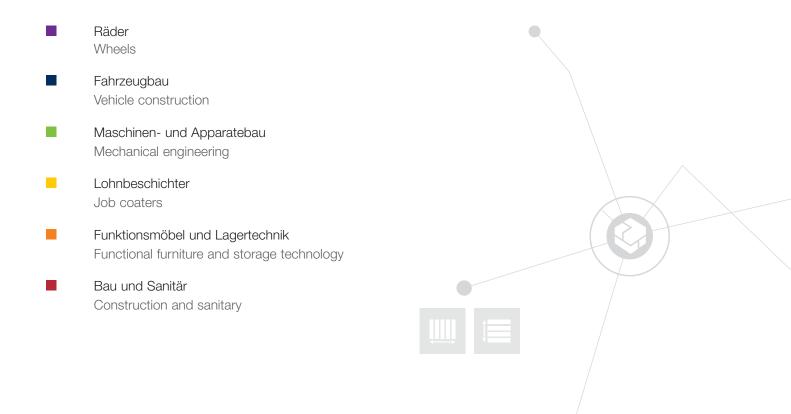

Headquarters

FreiLacke | Emil Frei GmbH & Co. KG Am Bahnhof 6 78199 Bräunlingen/Döggingen Germany

Phone +49 7707 151-0 Fax +49 7707 151-238

info@freilacke.de www.freilacke.com