



FREIOTHERM-ATL-First Filling

WA4121EF2044

Characteristics	<ul style="list-style-type: none"> ■ Anodic electrocoat paint depositable 1K ■ Application, e.g. in the construction and sanitary sector ■ Primer ■ Release Properties 												
Technical / Physical Data	<table border="1"> <tr> <td>■ Binder-Base</td> <td>Acrylic Resin</td> </tr> <tr> <td>■ Colour</td> <td>faral bianco Based on the specified colour template (i.e. RAL)</td> </tr> <tr> <td>■ Solid Mass DIN EN ISO 3251</td> <td>43-47 %</td> </tr> <tr> <td>■ Density calculated</td> <td>1,12 g/cm³</td> </tr> <tr> <td>■ MEQ-Base-Value DIN EN ISO 15880</td> <td>50-61</td> </tr> <tr> <td>■ Test layer thickness</td> <td>20-30 µm</td> </tr> </table>	■ Binder-Base	Acrylic Resin	■ Colour	faral bianco Based on the specified colour template (i.e. RAL)	■ Solid Mass DIN EN ISO 3251	43-47 %	■ Density calculated	1,12 g/cm ³	■ MEQ-Base-Value DIN EN ISO 15880	50-61	■ Test layer thickness	20-30 µm
■ Binder-Base	Acrylic Resin												
■ Colour	faral bianco Based on the specified colour template (i.e. RAL)												
■ Solid Mass DIN EN ISO 3251	43-47 %												
■ Density calculated	1,12 g/cm ³												
■ MEQ-Base-Value DIN EN ISO 15880	50-61												
■ Test layer thickness	20-30 µm												
Mechanical Test	<ul style="list-style-type: none"> ■ on aluminium / aluminium pressure casting ■ Cross-cut-test DIN EN ISO 2409 <table border="1"> <tr> <td></td> <td>Gt 1</td> </tr> </table>		Gt 1										
	Gt 1												
Resistance Test	<ul style="list-style-type: none"> ■ on aluminium / aluminium pressure casting ■ Condensate constant climate DIN EN ISO 6270-2 (CH) <table border="1"> <tr> <td>504 hours water ingress Wb <1 mm DIN EN ISO 4628-8</td> </tr> </table>	504 hours water ingress Wb <1 mm DIN EN ISO 4628-8											
504 hours water ingress Wb <1 mm DIN EN ISO 4628-8													
Processing and application Dependent on plant and buildings	<ul style="list-style-type: none"> ■ Pretreatment The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. ■ Gloss value DIN EN ISO 2813 ■ pH-Value ■ Cundctance ■ Solid Mass DIN EN ISO 3251 ■ MEQ-Base-Value DIN EN ISO 15880 ■ Organic Solvent Content ■ Bath Temperature ■ Coating Time ■ Deposition Voltage ■ Health & Safety at Work guidelines The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet. 												
Curing	<ul style="list-style-type: none"> ■ Object temperature 												


Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business and delivery.



FREIOTHERM-ATL-First Filling
WA4121EF2044

Recommended baking temperature 20 Min./170 °C

green cross-hatching = baking conditions with good final properties

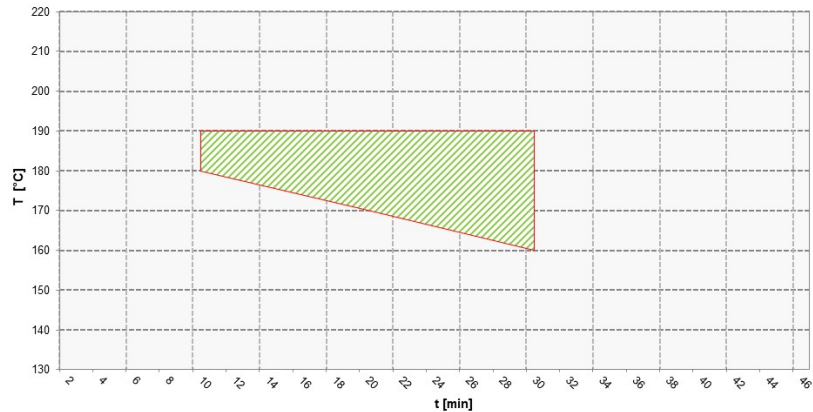

Resistance to storage

- One Turn-Over per year

Approx. 3 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.

The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.

Specific comments

- **Test conditions**

All information is based on a standard climate 23/50 DIN EN 23270.

All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.