



## WA4970HRU905

## FREIOTHERM-ATL-CorrosionResist

### Product description

<b>Product technology</b>	anodic electrocoat paint depositable 1K	
<b>Application area</b>	e.g. in the vehicle construction sector	
<b>Type of paste</b>	Subsequent paste filling, partly neutralised	
<b>Corrosion protection</b>	good	

### General product properties

<b>Binder-Base</b>	Acrylic-Epoxy Resin	
<b>Colour</b>	Jet black	
<b>MEQ-Base-Value</b>	58 - 65 mg/g	DIN EN ISO 15880
<b>Density</b>	1,0-1,2 g/cm <sup>3</sup>	theoretical
<b>Solid mass</b>	63 - 67 %	theoretical
<b>Resistance to storage</b>	approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.	
	The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.	

### Application and processing

<b>Pretreatment</b>	The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, mill scale, wax and release agent residues. We recommend the use of suitable mechanical pre-treatment processes (e.g. blasting, grinding) or chemical pre-treatment processes (e.g. phosphating) according to the requirements.	
<b>Gloss value</b>	40-60 GU, Angle 60°	DIN EN ISO 2813
<b>Recommended coating thickness</b>	17-25 µm	
<b>pH-Value</b>	8,5-9,5	DIN 19260
<b>Cunductance</b>	1300-1700 µS/cm	
<b>Solid mass</b>	13-15 %	DIN EN ISO 3251
<b>MEQ-Base-Value</b>	75-85 mg/g	DIN EN ISO 15880
<b>Organic Solvent Content</b>	1,0-2,5 %	
<b>Bath Temperature</b>	24-27 °C	
<b>Coating Time</b>	120-240 sec.	
<b>Deposition Voltage</b>	150-300 Volts	



## WA4970HRU905

### FREIOTHERM-ATL-CorrosionResist


#### Turn-over

1 Turnover per year

To ensure bath stability and thus the coating quality, the specified turnover (solids exchange of the tank) must be observed.

#### Curing

Recommended object temperature 20 min/170 °C

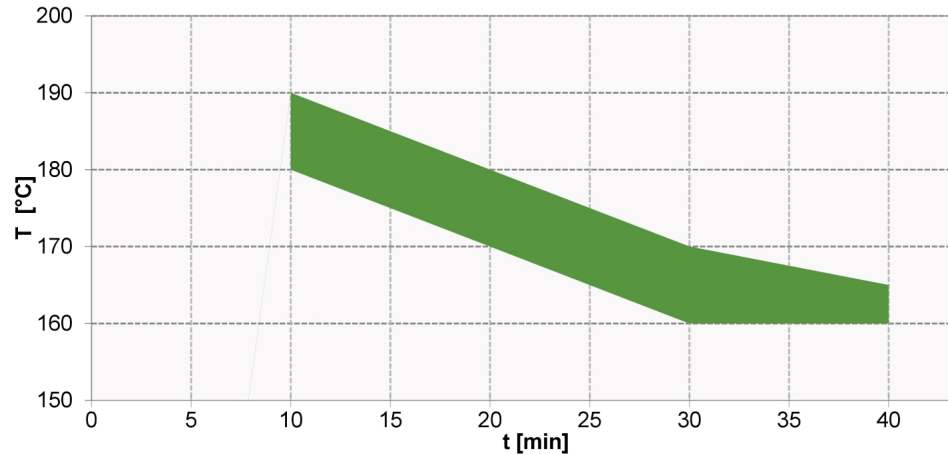

Objekt Temperatur in °C Object Temperature in °C	160	170	180
Haltezeit Minimum in Minuten Holding time minimum in minutes	30	20	10
Haltezeit Maximum in Minuten Holding time maximum in minutes	40	30	20

#### Note on curing

Coloured area = stoving conditions with good end properties

The displayed baking conditions are based on results from laboratory tests and therefore merely serve as a guideline when configuring the processing company's coating systems. The processing company is responsible for ensuring that the coating is fully cured. The complete curing of the coating must be checked by means of additional analytical and resistance tests using representative original parts under production conditions. Please do not hesitate to contact us if you require consultation.

#### Mechanical tests

Test substrate	on zinc phosphate		
Cross-cut-test	Gt 0		DIN EN ISO 2409

#### Climatic tests

Test substrate	on zinc phosphate		
Neutral salt spray test	Load duration	240 h	DIN EN ISO 9227 (NSS)
	Detachment Cut	<2 mm	DIN EN ISO 4628-8

#### Chemical resistance



## WA4970HRU905

### FREIOTHERM-ATL-CorrosionResist

#### Influencing factors

The chemical resistance depends on the concentration, temperature, exposure time and test method. This has to be checked depending on the application.

#### Comments

##### Work-and Healthprotection

The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health and Safety at Work and environmental protection can be found in the corresponding safety data sheet.

##### Test conditions

All information is based on a standard climate 23/50 DIN EN 23270. All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.