


# FREIOTHERM-Hydro-Coating WO1842H

<b>Characteristics</b>	<ul style="list-style-type: none"> <li>■ Water-thinnable baking coating</li> <li>■ Application, e.g. in the functional furniture and storage technology sector</li> <li>■ Good adhesion to steel and non-ferrous metals</li> <li>■ Good condensation resistance</li> <li>■ Good hardness and elasticity</li> <li>■ Can be coated over with powder coatings</li> <li>■ For interior use</li> </ul>																						
<b>Technical / Physical Data</b>	<table border="1"> <tr> <td>■ Binder-Base</td> <td>Combination of acrylate/amino resin</td> </tr> <tr> <td>■ Colour</td> <td>All common colour shades</td> </tr> <tr> <td>■ Gloss value DIN EN ISO 2813</td> <td>satin glossy 65-75 Angle 60°</td> </tr> <tr> <td>■ Viscosity DIN 53211 (formerly)</td> <td>Flow time 45-55 seconds 4 mm viscosity cup</td> </tr> <tr> <td>■ Thinner</td> <td>demineralised water</td> </tr> <tr> <td>■ pH-Value</td> <td>8,5-8,7</td> </tr> <tr> <td>■ Density calculated</td> <td>1,2-1,35 g/ml</td> </tr> <tr> <td>■ Solid Mass calculated</td> <td>45-58 %</td> </tr> <tr> <td>■ Solid content in volume calculated</td> <td>270-330 ml/kg</td> </tr> <tr> <td>■ Material usage theoretical, without application loss</td> <td>230-250 g/m<sup>2</sup>, Layer thickness 80 µm</td> </tr> <tr> <td>■ Reference colour of the specified values</td> <td>Colour of WO1842HRA910</td> </tr> </table>	■ Binder-Base	Combination of acrylate/amino resin	■ Colour	All common colour shades	■ Gloss value DIN EN ISO 2813	satin glossy 65-75 Angle 60°	■ Viscosity DIN 53211 (formerly)	Flow time 45-55 seconds 4 mm viscosity cup	■ Thinner	demineralised water	■ pH-Value	8,5-8,7	■ Density calculated	1,2-1,35 g/ml	■ Solid Mass calculated	45-58 %	■ Solid content in volume calculated	270-330 ml/kg	■ Material usage theoretical, without application loss	230-250 g/m <sup>2</sup> , Layer thickness 80 µm	■ Reference colour of the specified values	Colour of WO1842HRA910
■ Binder-Base	Combination of acrylate/amino resin																						
■ Colour	All common colour shades																						
■ Gloss value DIN EN ISO 2813	satin glossy 65-75 Angle 60°																						
■ Viscosity DIN 53211 (formerly)	Flow time 45-55 seconds 4 mm viscosity cup																						
■ Thinner	demineralised water																						
■ pH-Value	8,5-8,7																						
■ Density calculated	1,2-1,35 g/ml																						
■ Solid Mass calculated	45-58 %																						
■ Solid content in volume calculated	270-330 ml/kg																						
■ Material usage theoretical, without application loss	230-250 g/m <sup>2</sup> , Layer thickness 80 µm																						
■ Reference colour of the specified values	Colour of WO1842HRA910																						
<b>Substrate</b>	<ul style="list-style-type: none"> <li>■ ATL-primed</li> <li>■ Steel</li> <li>■ Steel, passivated or pretreated substrates</li> </ul>																						
<b>Pretreatment</b>	<ul style="list-style-type: none"> <li>■ The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. Preliminary tests are recommended for assuring the suitability of coating qualities on the substrate. For more stringent requirements, we recommend: for corrosion protection - e.g. phosphating for adhesion - e.g. blasting, pickling, sanding</li> </ul>																						
<b>Structure recommendation</b>	<table border="1"> <tr> <td>■ Substrate</td> <td>on bare steel plate</td> </tr> <tr> <td>■ Top coat</td> <td>WO1842HRA910 Dry film thickness 30 µm</td> </tr> </table>	■ Substrate	on bare steel plate	■ Top coat	WO1842HRA910 Dry film thickness 30 µm																		
■ Substrate	on bare steel plate																						
■ Top coat	WO1842HRA910 Dry film thickness 30 µm																						
<b>Mechanical Test</b>	<table border="1"> <tr> <td>■ Cross-cut-test DIN EN ISO 2409</td> <td>Gt 0</td> </tr> </table>	■ Cross-cut-test DIN EN ISO 2409	Gt 0																				
■ Cross-cut-test DIN EN ISO 2409	Gt 0																						
<b>Resistance Test</b>																							

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business and delivery.




**FREIOTHERM-Hydro-Coating**  
WO1842H

■ Condensate constant climate DIN EN ISO 6270-2 (CH)	120 hours Degree of blistering 0 (S 0) DIN EN ISO 4628-2
■ Salt spray test (CASS) DIN EN ISO 9227	120 hours Water ingress Wb < 1 mm DIN EN ISO 4628-8
■ Chemical resistance	Needs to be checked. The temperature and concentration of chemicals have a major influence on the test outcome.


<b>Processing and application</b>	■ Prior to use, stir well or mix components homogeneously (e.g. with fast mixer). To prevent skin formation, over-coat with water. Dry film thickness must not exceed 45 µm - risk of reaction bubbles.	
	■ Object temperature	18-25 °C
	■ Processing conditions	Room temperature 18-25 °C Relative humidity 40-60 %
	■ High pressure spraying	as delivered viscosity Nozzle: 1,2 mm Spray pressure 4 bar
	■ Over-coating capability	possible based on pre-test
	■ Cleaning of equipment	Immediately with water - possibly with addition of 5-10 % by weight EFD cleaning agent 400916. Dried-on equipment with org. solvents, e.g. EFD thinner 400424.
	■ <b>Health &amp; Safety at Work guidelines</b> The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous substances, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet.	

<b>Curing</b>	■ Oven drying	4 min./ 150 °C - 10 min./ 160 °C
	■ <b>Object temperature</b> green cross-hatching = baking conditions with good final properties	

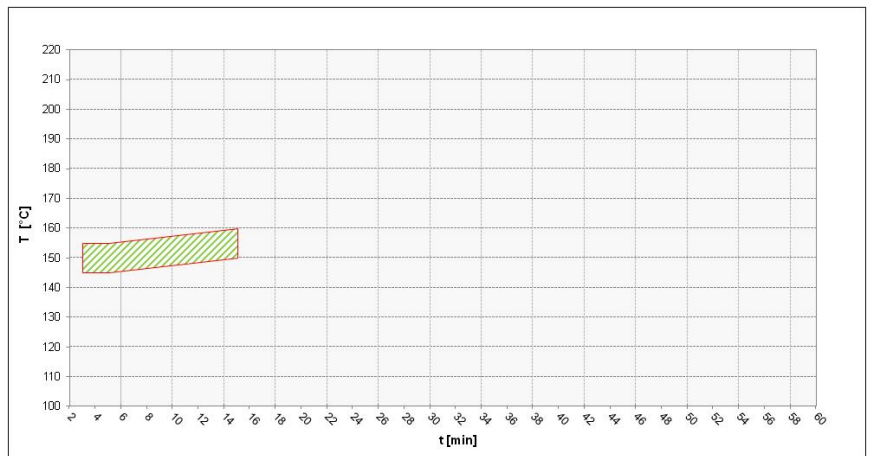

<b>Resistance to storage</b>	
------------------------------	--

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business and delivery.



**FREIOTHERM-Hydro-Coating**  
**WO1842H**

	<ul style="list-style-type: none"> <li>■ Approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.</li> </ul> <p>The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.</p>
<b>Specific comments</b>	<ul style="list-style-type: none"> <li>■ <b>EFD-info</b> Refer to the EFD information for further technical information. Nr. 111+151</li> <li>■ <b>Test conditions</b> All information is based on a standard climate 23/50 DIN EN 23270. All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.</li> </ul> <p>The information provided here contains reference values and does not constitute a specification.</p>